


## CROSSROADS





Port

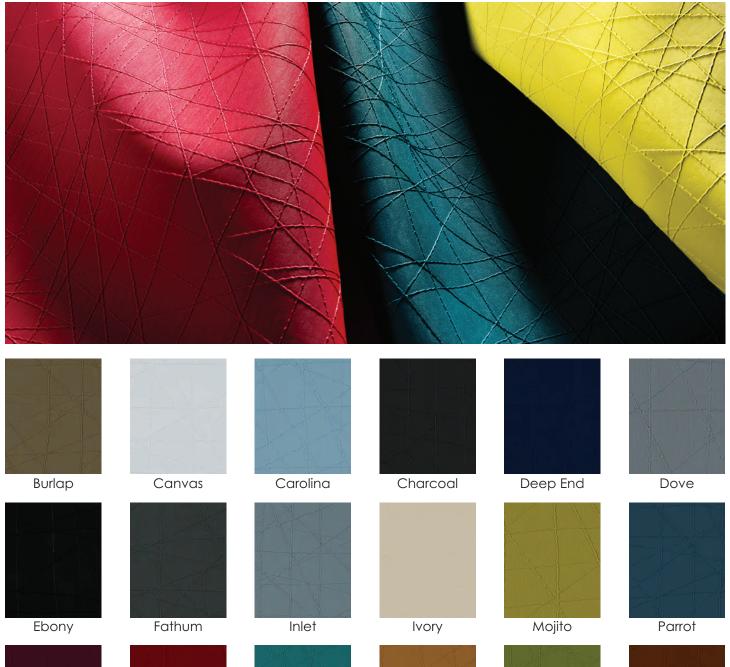

Teal



Scarlet

Truffle



Sesame

Sprout

Tawny



## **PRODUCT SPECIFICATIONS**

Construction	Values		Test Method	
Surface Composition	100% PVC		ASTM D 751-06	
Backing Composition	100% Polyester		ASTM D 751-06	
Finished Width	54" min.		ASTM D 751-06	
Repeat	None		ASTM D 751-06	
Railroaded	No			
Put-up	30 yards			
Cleaning Code	W/S			
Performance	Values		Test Method	
Grab Tensile	140 lbs./in.× 140 lbs./in. min.		ASTM D 751-06	
Trap Tear	22 lbs./in. × 35 lbs./in. min.		ASTM D 751-06	
Seam Strength	40 lbs./in. × 50 lbs./in. min.		ASTM D 751-06	
Adhesion	2.4 lbs./in. × 2.5 lbs./in. min.		ASTM D 751-06	
Flex Resistance	25,000 Cycles		ASTM D 2097-91	
Blocking	No. 1 - Pass		FTMS 191A-TM5872	
Wyzenbeek Abrasion	300,000 cycles, #10 cotton duck		ASTM D 4157-13	
UV Stability	650 hours		ASTM D 4329-05	
Crock Resistance	Dry-4.5; Wet-4.5		AATCC 8-2007	
Antibacterial Activity	Pass		AATCC-147-2024	
Stretch @ 15# (MD×CD)	15% × 21%		ASTM D 751-06	
Cold Cracking (#5 roller)	-40° F		CFFA-6A	
Flammability		Environmental		
California Technical Bulletin 117-2013, Sec. 1 Pass		1. Does not conto	1. Does not contain PFAS, PFOA	
IMO A-652(16) 8.2 Pass		2. Prop 65 compliant		

3. No chemical flame retardants, CA AB2998 compliant

## Suitable Applications Commercial

## **Cleaning and Disinfecting**

NFPA 260

U.F.A.C. Class I

Remove ordinary dirt and smudges with mild soap and water. A 10:1 ratio of water to bleach solution may be used as a disinfectant. Rinse the surface with clean water after disinfecting. Dry with a soft, lint-free cloth or towel. We recommend that you use Clorox Healthcare and Clorox Pro products to disinfect Mitchell products in commercial settings.

Pass

Pass

