
MITCHELL
COLLECTION

# COWBOY

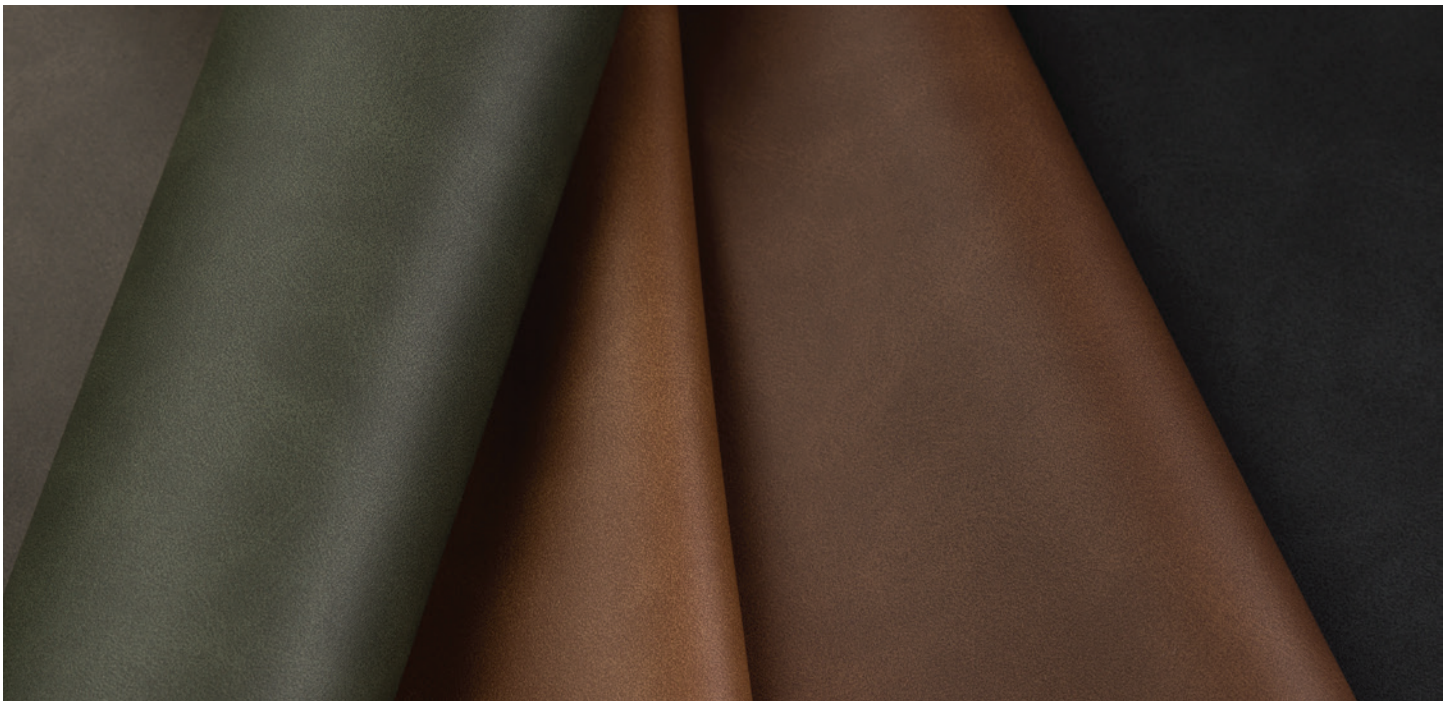


Bedrock


Bone


Brandy


Caramel


Cowhide


Dove


Dune


Dustbowl


Grey


Ivory


Mesquite


Pine


Slate


Tombstone


Tumbleweed

MITCHELL COLLECTION

# PRODUCT SPECIFICATIONS

# COWBOY

| Construction | Values | Test Method |
|---|---|---|
| Surface Composition | 100% PVC | ASTM D 751-06 |
| Backing Composition | 80% Polyester / 20% Cotton | ASTM D 751-06 |
| Weight @ 54" | 26.5 oz./yd | ASTM D 751-06 |
| Finished Width | 54" min. | ASTM D 751-06 |
| Repeat | None | |
| Railroaded | No | |
| Put-up | 30 yards | |
| Cleaning Code | W - Bleach Cleanable 10:1 | |

| Performance | Values | Test Method |
|---|---|---|
| Grab Tensile | 90 lbs./in.× 70 lbs./in. min. | ASTM D 751-06 |
| Trap Tear | 12 lbs./in. × 12 lbs./in. min. | ASTM D 751-06 |
| Seam Strength | 65 lbs./in. × 65 lbs./in. min | ASTM D 751-06 |
| Adhesion | 4 lbs./in. × 4 lbs./in. min. | ASTM D 751-06 |
| Stretch @15# (MD×CD) | 2% × 7% | ASTM D 751-06 |
| Flex Resistance | 25,000 cycles | ASTM D 2097-03(2010) |
| Blocking | No. 1 – Pass | FTMS 191A-TM5872 |
| Crock Resistance | D-4; W-4 | AATCC 8-2007 |
| Wyzenbeek Abrasion | 100,000 cycles, #10 cotton duck | ASTM D 4157-92 |
| UV Stability | 200 hours | ASTM D 4329-05 |

## Flammability

| | |
|---|---|
| California Technical Bulletin 117-2013, Sec. 1 | Pass |
| FMVSS/CMVSS #302 | Pass |
| NFPA 260 | Pass |
| U.F.A.C. Class I | Pass |

## Environmental

1. Phthalate free
2. Lead free
3. No FR chemicals
4. No antimicrobial chemicals

## Suitable Applications

Contract, Hospitality

## Cleaning and Disinfecting

Remove ordinary dirt and smudges with mild soap and water. Stains can be removed with water-based household cleaners. Rinse with water after application of cleaners. Do not use chemical cleaners on this product.

MITCHELL Performance Faux Leathers | CLOROX HEALTHCARE

*The Mitchell Group is a compatibility partner with Clorox Healthcare*

The Mitchell Group
7040 N. Austin Avenue | Niles, IL 60714
847.647.7300 | mitchellfauxleathers.com