





Amber

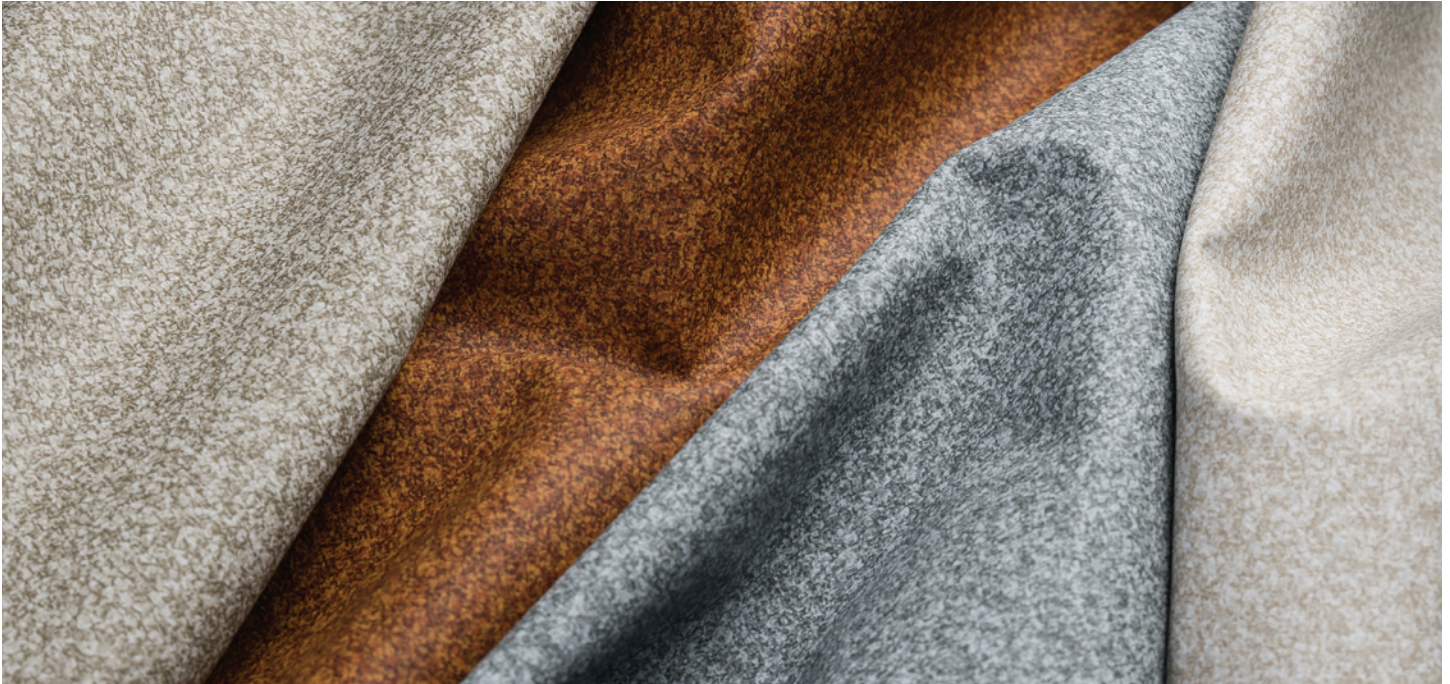


Baltic



Bark



Copper



Glacier



Glow



Jade




Milkstone



Mint




Nightfall



Overcast



Pebble



Plum




Shadow



Sienna



Sunlit




Tropic



Vintage



Whisper



Winter



| Construction                         | Values                                                                    | Test Method      |
|--------------------------------------|---------------------------------------------------------------------------|------------------|
| Chemical Coating Face                | 94% Bio-Attributed PU build on Susterra® PDO and 6% Silicone Protection   |                  |
| Top Finish Protection                | Hydro-Sil™ proprietary silicone-based finish for ink and stain resistance |                  |
| Backing Composition                  | 100% GRS Transaction Certified Polyester                                  | ASTM D 751-06    |
| Finished Width                       | 54" min.                                                                  |                  |
| Put-up                               | 30 yards                                                                  | ASTM D 751-06    |
| Repeat                               | None                                                                      |                  |
| Cleaning Code                        | W/S                                                                       |                  |
| Performance                          | Values                                                                    | Test Method      |
| Adhesion                             | 4 lbs./in. × 4 lbs./in. min.                                              | ASTM D 751-06    |
| Grab Tensile                         | 100 lbs./in. × 180 lbs./in. min.                                          | ASTM D 751-06    |
| Trap Tear                            | 25 lbs./in. × 25 lbs./in. min.                                            | ASTM D 751-06    |
| Seam Strength                        | 60 lbs./in. × 70 lbs./in. min.                                            | ASTM D 751-06    |
| Stretch at 27# MD (warp) × CD (fill) | 2% × 9%                                                                   | SAE J855, 2002   |
| Flex Resistance                      | 25,000 cycles                                                             | ASTM D 2097-91   |
| Blocking                             | No. 1 - PASS                                                              | FTMS 191A-TM5872 |
| Crock Resistance                     | Dry Grade: 4.5 / Wet Grade: 4.5                                           | AATCC 8-2007     |
| Wyzenbeek Abrasion                   | 500,000 cycles, #10 Cotton Duck                                           | ASTM D 4157-13   |
| Hydrolysis Resistance                | 24 weeks                                                                  | ISO 5423: 1992 E |
| UV Stability                         | 200 hours                                                                 | ASTM D 4329-05   |
| Cold Crack (5# roller)               | -40°F                                                                     | CFFA-6A          |

### Environmental

|                                                                              |                                                    |
|------------------------------------------------------------------------------|----------------------------------------------------|
| No PVC, plasticizers, phthalates, formaldehyde, stabilizers, or heavy metals | No halogenated FR Chemicals - CAL AB2998 compliant |
| No persistent organic pollutants (POPs)                                      | Conflict mineral free                              |
| No DMF or DMFA                                                               | Prop 65 compliant and LBC Red List compliant       |
| Zero chemical solvents                                                       | CAL 01350 VOC compliant / Low VOCs                 |
| No ozone-depleting chemicals                                                 | RoHS, REACH compliant; LEED - prequalified         |
| No anti-microbial additives                                                  | ASTM D6866 verified biobased inputs                |
| Biocide, BPA, and TRIS Free                                                  | Meets CFFA 201 testing requirements                |

### Flammability

|                  |      |                  |      |
|------------------|------|------------------|------|
| CA TB117-2013    | Pass | NFPA 260         | Pass |
| IMO A.652(16)8.2 | Pass | U.F.A.C. Class I | Pass |

### Suitable Applications

Contract, Healthcare, Hospitality, Residential

### Cleaning and Disinfecting

Remove ordinary dirt and smudges with mild soap and water. A 10:1 ratio of water to bleach solution may be used as a disinfectant. Rinse the surface with clean water after disinfecting. Dry with a soft, lint-free cloth or towel. We recommend you use Clorox Healthcare and Clorox Pro products to disinfect Mitchell products in commercial settings.



The Mitchell Group is a compatibility partner with Clorox Healthcare



The Mitchell Group  
7040 N. Austin Avenue | Niles, IL 60714  
847.647.7300 | mitchellfauxleathers.com