




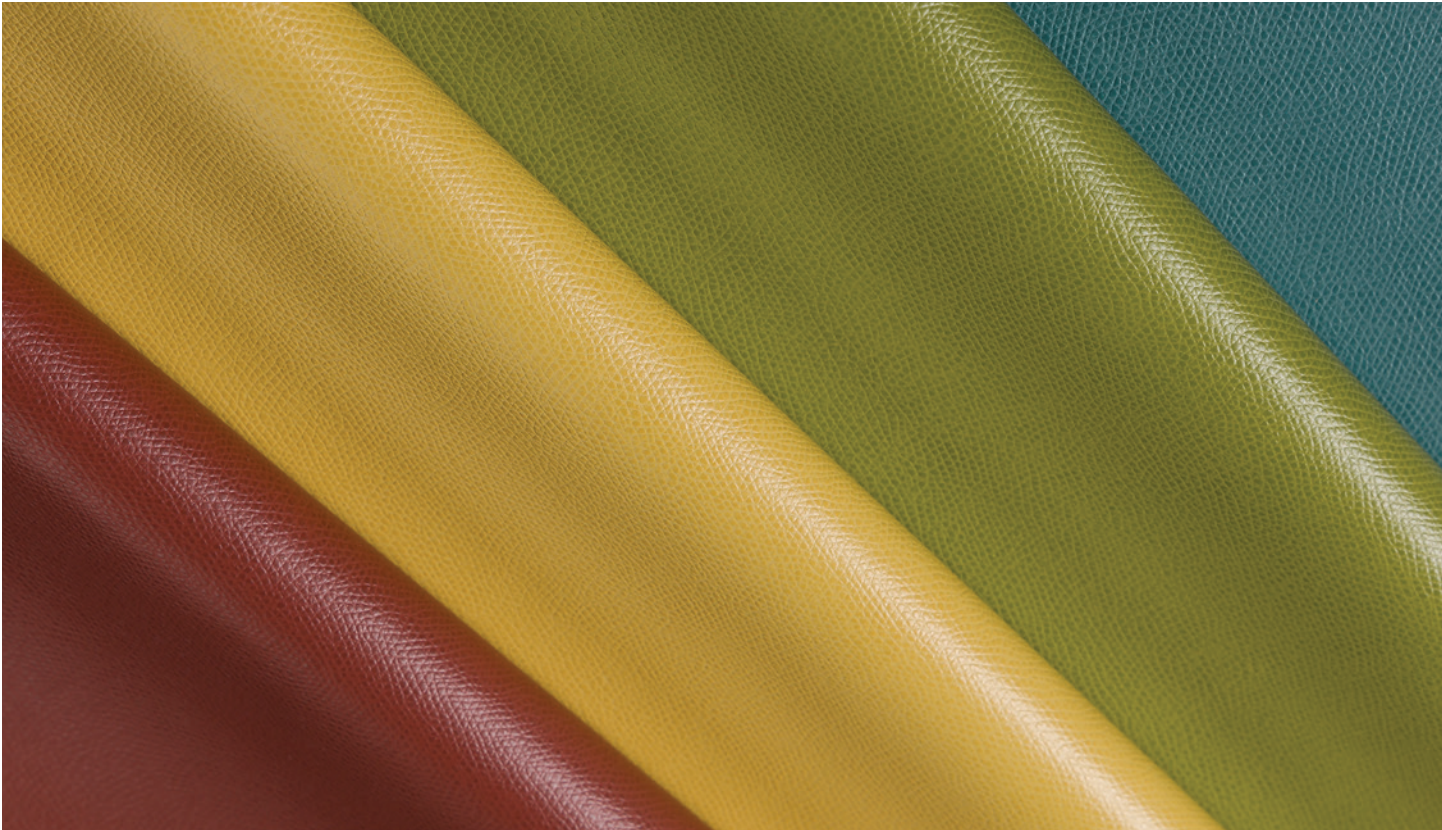




Aegean




Almond



Brown Sugar



Butter



Cadet



Canvas



Chocolate



Cream



Desert




Dijon




Dove




Ecru



Field



Forest



Honey




Iris



Marlin




Merlot




Metal




Mink



Ocean



Onyx



Patriot




Pavement




Penny




Rattan



Sand



Sea Water



Taupe



Toffee



Truffle



White

Construction

Surface Composition
Backing Composition
Finished Width
Repeat
Railroaded
Put-up
Cleaning Code
Stain Resistant

Values

100% Polyurethane
100% Polyester
54" min.
None
No
30 yards
W/S
Yes

Test Method

ASTM D 751-06
ASTM D 751-06

Performance

Grab Tensile
Trap Tear
Seam Strength
Adhesion
Stretch @ 15# (MD×CD)
Flex Resistance
Blocking
Crock Resistance
Wyzenbeek Abrasion
Hydrolysis Resistance
UV Stability
Blue Dye Transfer Resistance
Cold Crack

Values

50 lbs./in. × 50 lbs./in. min.
15 lbs./in. × 15 lbs./in. min.
40 lbs./in. × 40 lbs./in. min.
4 lbs./in. × 4 lbs./in. min.
5% × 10%
25,000 cycles
No. 1 - Pass
Dry-4; Wet-4
100,000 cycles, #10 Cotton Duck
24 weeks
150 hours
Dry 4-5; Wet 4-5
-20°F

Test Method

ASTM D 751-06
ASTM D 751-06
ASTM D 751-06
ASTM D 751-06
ASTM D 751-06
ASTM D 2097-91
Fed. Std. 191A-TM5872
AATCC 8-2013
ASTM D 4157-13
ISO 1419: 1995 E
ASTM D 4329-05
LP-463KC-04-03
CFFA-6A

Flammability

California Technical Bulletin 117-2013, Sec. 1 Pass
IMO A.652(16)8.2 Pass
NFPA 260 Pass
U.F.A.C. Class I Pass

Environmental

1. No anti-microbial additives
2. Does not contain PFAS, PFOA
3. Prop 65 compliant
4. No chemical flame retardants, CA AB2998 compliant
5. REACH, RoHS, and LEED compliant

Suitable Applications Contract, Healthcare, Hospitality, Residential

Cleaning and Disinfecting

Remove ordinary dirt and smudges with mild soap and water. A 10:1 ratio of water to bleach solution may be used as a disinfectant. Rinse the surface with clean water after disinfecting. Dry with a soft, lint-free cloth or towel. We recommend that you use Clorox Healthcare and Clorox Pro products to disinfect Mitchell products in commercial settings.



The Mitchell Group is a compatibility partner with Clorox Healthcare

The Mitchell Group
7040 N. Austin Avenue | Niles, IL 60714
847.647.7300 | mitchellfauxleathers.com